



PV Module TITAN M6-60



High Efficiency PV Modules

Strengths

- Positive power tolerance
- High Efficiency Multi Crystalline Modules
- TUV Certifications:
 - EN IEC 61215 : 2005
 - EN IEC 61730-1 : 2004 / 2007
 - EN IEC 61730-2 : 2004 / 2007
 - EN IEC 61701 : 2010-02
- Qualified for Highly corrosive Wet-Atmospheres & Environments

Product Guarantee : 5 years

Limited Power Warranty : 90% @ 12 Years
80% @ 25 Years

Certifications



Typical Electrical Characteristics

		TITAN M6-60							
Type									
MaxPower@STC	Pmp (W)	220	225	230	235	240	245	250	
Power Tolerance	(W)	+0 to 4.9Wp or ±2.5%							
Max Power Voltage	Vmp(V)	28.80	29.19	29.61	30.02	30.23	30.40	30.72	
Max Power Current	Imp (A)	7.64	7.71	7.77	7.83	7.94	8.06	8.14	
Open Circuit Voltage	Voc (V)	36.42	36.78	37.08	37.32	37.56	37.68	37.80	
Short Circuit Current	Isc (A)	8.07	8.15	8.25	8.34	8.44	8.56	8.63	
Electrical parameters tolerance		±5%							
Max System Voltage	VDC	1000							
Number, type and arrangement of cells		60, Multi-Crystalline, 10 x 6 Matrix							
Cell Size		6" x 6" / 156 x 156 mm							
No. of By-pass Diodes		3							
Max. Series Fuse	(A)	15							
Pm Temperature Co-efficient (γ)	(%/°C)	-0.43							
Isc Temperature Co-efficient (α)	(%/°C)	+0.04							
Voc Temperature Co-efficient (β)	(%/°C)	-0.32							
NOCT at STC	(°C)	45±1							

Mechanical Characteristics

Junction Box		ZJRH / BizLink SunBolts / H+S
Type of connector		MC4 / BizLink SunBolts/ H+S
Dimensions (L x W x Th)	mm	1657 x 987 x 42
Weight	Kg	19.0
No. of Drain Holes in Frame		12
Glass Type and Thickness		3.2 mm Thick, Low iron, Tempered

Packing Configuration

Packing Configuration	24 Modules in each pallet
1 * 20 Ft	144 Modules
1 * 40 Ft STD	336 Modules
1 * 40 Ft HQ	672 Modules


Absolute Ratings

Operating Temperature	(°C)	-40 ~ +85
Storage Temperature	(°C)	-40 ~ +85

NOTE: The data presented may change due to further improvements in the product.


PV Module TITAN M6-60

Typical I-V Curves

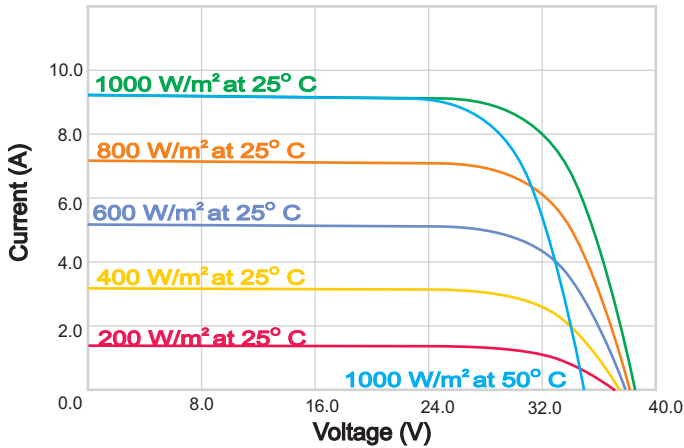

Current/voltage dependence on irradiance and module temperature. These I-V curves indicate the effect of temperature and light intensity on module Performance.

Dimensions

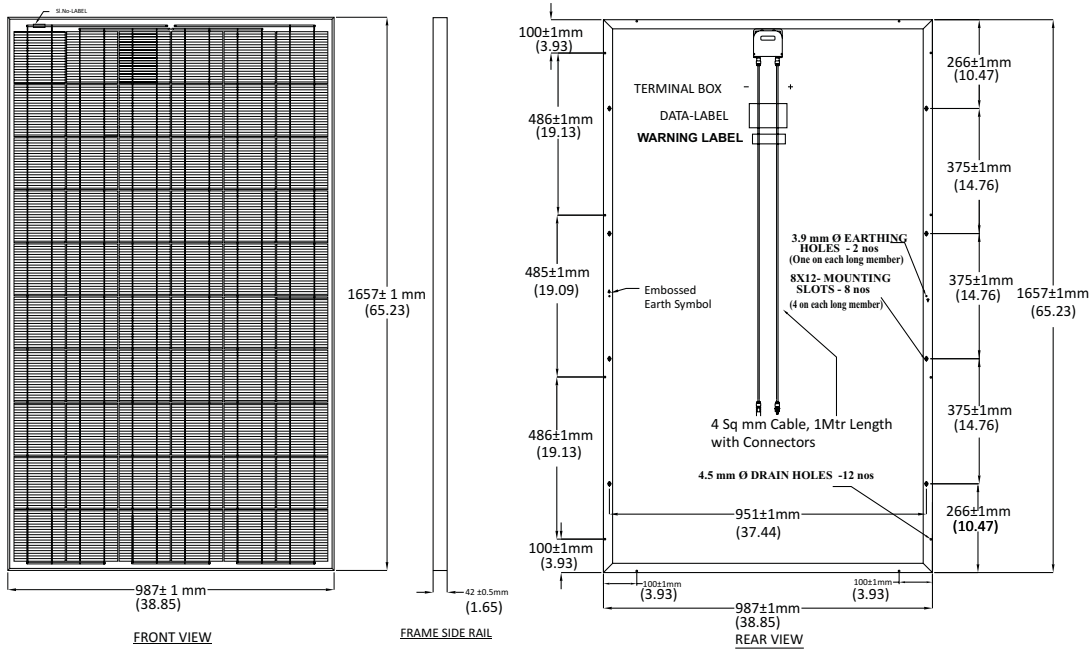

Dimensions given in Parentheses are in inches

PV Module Products

- M6-72 Family Series (305Wp to 125Wp) : M6-72, M6-60, M6-54 & M6-36 - Certified for IEC Standards
M6-60: Certified for UL (USA & Canada) Standard; M6-72: Certification for UL (USA & Canada) is in Progress
- S6-60 Family Series (250Wp to 120Wp) : S6-60, S6-54 & S6-36 - Certified for IEC Standards
S6-60 - Certified for UL (USA & Canada) Standard
- S6-72 Family Series (300Wp to 285Wp) : Certification for IEC & UL (USA & Canada) Standards
- S5-96 Family Series (250Wp to 75Wp) : S5-96, S5-72, S5-60, S5-54 & S5-36 - Certified for IEC Standards



Corporate Office (India) :
TITAN Energy Systems Ltd,
 16, Aruna Enclave, Trimulgherry,
 Secunderabad – 500 015, INDIA
 Phone: +91 (0)40 27791085, 27790751
 Fax: +91 (0)40 27795629
 Email: info@titan-energy.com

Sales Office (Europe) :
TITAN Energy Systems Ltd,
 Basel, 4052
 Switzerland
 Phone: +41-6150-0052-9

Email: info.eu@titan-energy.com